


Energy conscious

Strong

Ultra-taut

Surface-mounted SC800-ZIP screen

Offering the highest possible wind classification, the SC800 ZIP surface-mounted screen can withstand strong gusts of wind without a problem. Good news for passive builders: the building shell is not perforated, so the house insulation remains intact. And so does the fabric. Even after years of use, it will remain taut and of impeccable quality. All thanks to the anti-wear fabric technology and our ingenious ZIP system. Moreover, this screen is insect-repellent - a blessing in the summer.



**ZIP SYSTEM:
TAUT FABRIC
FOR LONGER**

Unique features: surface-mounted SC800-ZIP screen

Perfect for passive builds:
No perforation of the building shell

Choice of two box designs:
modern and classic


Insect-repellent screen fabric

Taut fabric thanks to the
innovative ZIP system
with stainless steel spring

Ideal for renovations
and new builds

The fabrics have a longer
lifespan, thanks to the
unique Xglide technology

Highly windproof,
up to Beaufort level 6*

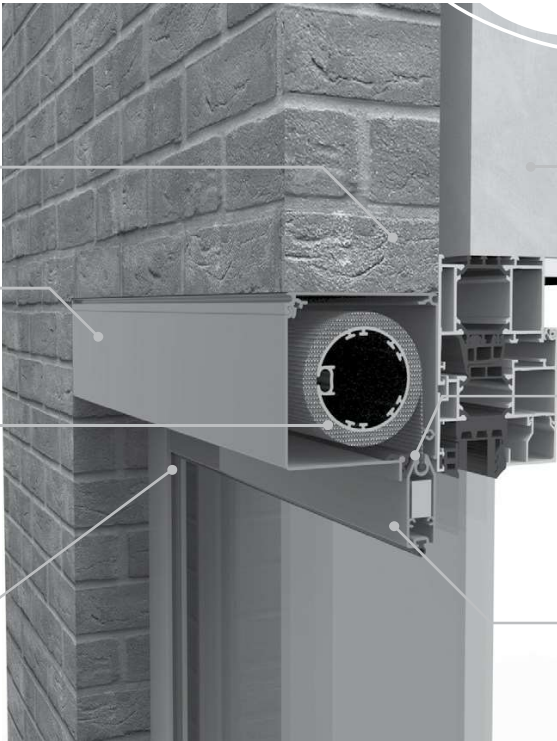


* Test results according to CSTC, at constant pressure of up to 1000 Pa
"> 140 km/h" and an average dimension of 3.5 x 3 m.

Screens that perfectly match your exterior joinery

All RAL colours at no additional cost.
Harol also offers the standard textured coating colours from these window manufacturers at no extra cost:

K-7 RAL range



aliplast
aluminium systems



sapa:
buildingsystem
ARCHITECTURAL ALUMINIUM SOLUTIONS

Finstral

Screen boxes that match your style

Square box




Available sizes:
73x73, 90x90,
110x110, 150x150

Rounded box



Available sizes:
73x73, 90x90,
110x110, 150x150

The perfect guide rail for every situation

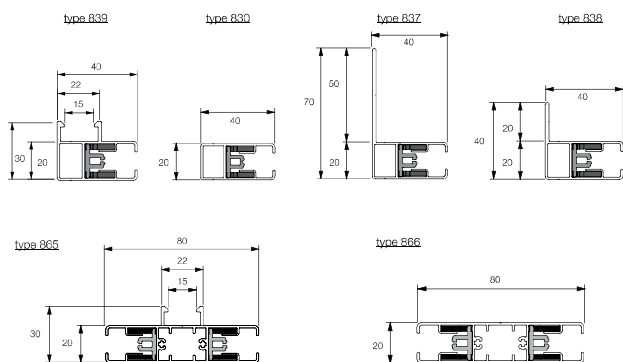

* Wider guide rails (55mm) also available

The right fabric for a perfect result

- » Visual comfort
- » Thermal and acoustic insulation
- » Extremely durable
- » Dirt-repellent and fire-resistant
- » Insect repellent
- » Your own logo or printing optional



Available fabrics and their features

Type	Soltis Horizon 86	Soltis Perform 92	Soltis Opaque B92	Serge 600	Serge 1%	Serge 600 Lunar
Weight approx. (g/m ²)	380	420	650	525	638	678
Thickness approx. (mm)	0.43	0.45	0.6	0.74	0.78	0.73
Transmission of direct sunlight	14%	3 ~ 4%	0%	5%	1%	0%
Solar factor: g _{tot} values*	0.15 - 0.22	0.05 - 0.15	0.02 - 0.05	0.01 - 0.10	0.05 - 0.09	0.02 - 0.09

* The lower the G-value, the greater the insulation
* Glazing C U=1.2

Serge Ferrari

copaco
screenweavers

Operating methods

- » Wireless: IO (standard)
RTS
- » Electrically operated: reduced price

somfy

Maximum dimensions

- » Max. width: 5 m
- » Max. height: 6 m
- » Max. area: 18 m²

