




**Sleek design**

**Solar powered**

**No building work required**

**Surface-mounted SC800-ZIP Solar**

The SC800-ZIP surface-mounted screen needs only sunlight and operates completely independently. It's a first! The screen is installed without any building or electrical work, meaning that the shell of your building remains intact. That makes it an interesting solution for both renovations and new builds. The powerful battery is integrated into the box as standard, maintaining its sleek character. Enjoy additional comfort, thanks to the sun.

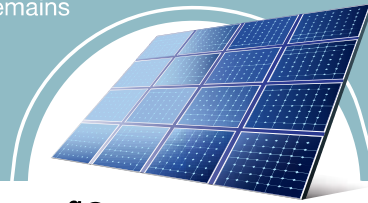

**SOLAR POWERED:  
NO BUILDING WORK  
REQUIRED!**

**Unique features: surface-mounted screen SC800-ZIP Solar**

No building or electrical work required

Sleek design with an integrated battery

Taut fabric, thanks to the innovative ZIP system with stainless steel spring



Ideal for renovations

Insect-repelling screen fabric

The fabrics have a longer lifespan, due to the unique Xglide technology

Highly windproof, up to 140 km/hour\*

\* Test results according to CSTC, at constant pressure of up to 1000 Pa  
"> 140 km/h" and an average dimension of 3.5 x 3 m.

## Screens that match your exterior joinery perfectly

All RAL colours at no additional cost.  
Harol also offers the standard textured coating colours from these window manufacturers at no extra cost:

K-7 RAL range



**aliplast**  
aluminium systems

**profel**  
ALUMINIUM SYSTEME

**REYNAERS**  
ALUMINIUM SYSTEME

**sapa:**  
buildingsystem  
ARCHITECTURAL ALUMINIUM SOLUTIONS

Finstral


## Sleek, square screen box



**Available sizes:**  
90x90\*,  
110x110\*, 150x150

\* The exterior dimensions of 90 and 110 are only available when the battery is installed outside the box (optional).

## The perfect guide rail for every situation

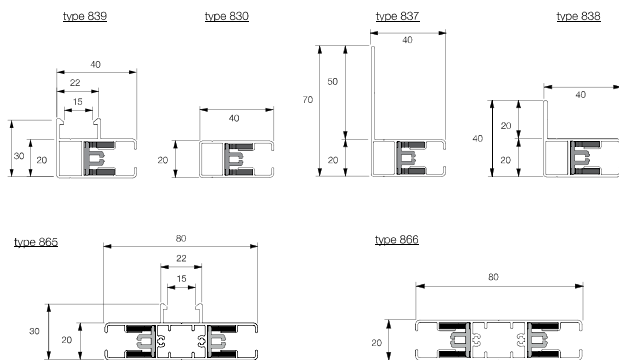

\* Wider guide rails (55mm) also available

## The right fabric for a perfect result

- » Visual comfort
- » Thermal and acoustic insulation
- » Extremely durable
- » Dirt-repellent and fire-resistant
- » Insect repellent
- » Your own logo or print optional



## Available fabrics and their features

Type	Soltis Horizon 86	Soltis Perform 92	Soltis Opaque B92	Serge 600	Serge 1%	Serge 600 Lunar
Weight approx. (g/m <sup>2</sup> )	380	420	650	525	638	678
Thickness approx. (mm)	0.43	0.45	0.6	0.74	0.78	0.73
Transmission of direct sunlight	14%	3 ~ 4%	0%	5%	1%	0%
Solar factor: g <sub>tot</sub> values*	0.15 - 0.22	0.05 - 0.15	0.02 - 0.05	0.01 - 0.10	0.05 - 0.09	0.02 - 0.09

The lower the G-value, the greater the insulation  
\* Glazing C U=1.2

**Serge Ferrari**

**copaco**

## Operating methods

- » Wireless: RTS

**somfy**

## Maximum dimensions

- » Max. width: 2.5 m
- » Max. height: 3 m
- » Max. area: 7.5 m<sup>2</sup>

